



Пневмоцилиндр 1412-D-S

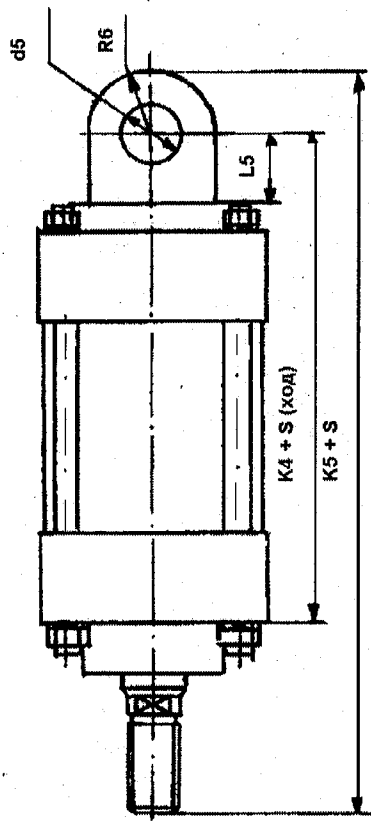


Крепление на проушине

Вид А

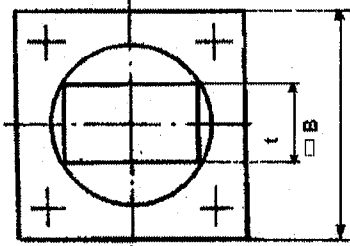

Пневмоцилиндр 1422-D-S

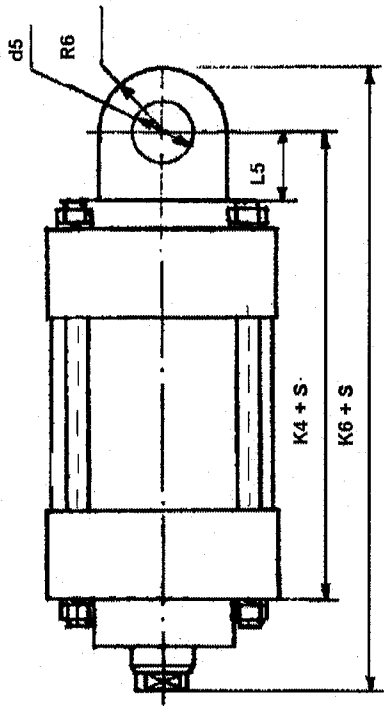

Обозначение пневмоцилиндра	R6 мм	B мм	K4 мм	K5 мм	K6 мм	t мм	L5 мм	d5 мм
1412-32-S	9	46	104	151	131	14	18	8
1422-32-S	9	46	104	151	131	14	18	8
1412-40-S	13	55	112	169	145	18	24	12
1422-40-S	13	55	112	169	145	18	24	12
1412-50-S	13	70	120	189	157	18	24	12
1422-50-S	13	70	120	189	157	18	24	12
1412-63-S	16	78	124	196	164	30	28	16
1422-63-S	16	78	124	196	164	30	28	16
1412-80-S	16	92	138	222	182	30	33	16
1422-80-S	16	92	138	222	182	30	33	16
1412-100-S	25	115	147	240	200	40	40	25
1422-100-S	25	115	147	240	200	40	40	25
1412-125-S	25	140	157	266	212	40	40	25
1422-125-S	25	140	157	266	212	40	40	25
1412-160-S	32	180	165	302	230	55	40	32
1422-160-S	32	180	165	302	230	55	40	32
1412-200-S	32	220	182	326	254	55	45	32
1422-200-S	32	220	182	326	254	55	45	32
1412-250-S	40	280	215	389	305	80	60	40
1422-250-S	40	280	215	389	305	80	60	40
1412-320-S	45	350	250	458	362	85	80	45
1422-320-S	45	350	250	458	362	85	80	45
1412-360-S	50	390	320	610	490	100	110	50
1422-360-S	50	390	320	610	490	100	110	50